



DATASHEET

24 Nov 2017

25cd Low-intensity Obstruction Light - Photocell and Flasher 10-60V_{DC} Defence Infrastructure Organisation - Ministry of Defence CEL-LI-25-DCW-PCFL - LED Aircraft Warning Light

Key Features

- Based on LED technology
- Extremely reliable long lifetime
- Suitable for off-shore use
- Very low power consumption
- 10-60V_{DC} input voltage
- Stabilised light output
- Lightweight and small - low wind load factor
- Easy to install, several mounting sets available
- Two cable glands, easy to chain without external junction boxes
- No RF-radiations
- Five (5) year warranty

Benefits

- Long maintenance intervals
- Low energy cost
- Supply voltage variations do not effect light output
- Very low total lifetime costs
- Low wind load

Specifications met

- Satisfies Ministry of Defence minimum vertical obstruction lighting criteria
- Recommended Standards and Practices
- Defence Estates UK-

Optical characteristics

- Intensity better than 25cd
- Colour aviation red
- Horizontal radiation pattern 360°
- Vertical radiation pattern 15°
- LED supply current stabilised by constant current generator
- Light output degradation less than 30% after 100,000hrs of operation

Electrical characteristics

- Input voltage range 10-60V_{DC}
- Power consumption less than 2.5W
- Current consumption when light is OFF: 2mA
- Over voltage protection

Mechanical characteristics

- Anodised marine grade aluminium body and end parts
- AISI 316 acid proof steel screws
- Colourless (clear) glass cover
- Terminal box for 1.5-6mm² wires
- Degree of protection IP 65
- Operating temperature range -55°C to +75°C
- Height 210mm, diameter 104mm, weight 1.1kg
- Wind load with CEL-MS-EV60 mounting kit@ 200km/h less than 40N

Options

- Mounting kits
- Without Photocell & flasher: Ref CEL-LI-25-DCW-F data sheet

Order Code: **CEL-LI-25-DCW-PCFL**




CEL-LI-25-DCW-PCFL

Photocell characteristics

- Turn on delay 1s
- Turn off delay 200s
- User selectable photocell sensitivity
OFF/200 lux/400 lux/ 800 lux

Flash controller characteristics

- User selectable flashing rate
- Steady burning/ 20fpm/ 40fpm/ 60fpm
- 250ms flash duration



T: +44 (0)20 8540 1034
F: +44 (0)20 8543 3058
E: info@contarnex.com

Contarnex Europe Limited
252 Martin Way,
Morden, Surrey SM4 4AW
United Kingdom



25cd Low-intensity Obstruction Light - Photocell and Flasher 10-60Vdc

Defence Infrastructure Organisation - Ministry of Defence

CEL-LI-25-DCW-PCFL - LED Aircraft Warning Light

ELECTRICAL INSTALLATION INSTRUCTIONS

CEL-LI-25-DCW-PCFL have two cable glands for easy chaining without external distribution boxes

CEL-LI-25-DCW-PCFL is an obstacle light utilising LED technology. The cabling and installation principles are similar to those of conventional obstacle lights.



Connection can be protected with a 6A or 10A fuse or with a circuit breaker (C curve).

Installation specifications

- Cable gland: M25
- Cable diameter: 11 to 17mm
- Wire diameter: max. 6mm²
- Recommended cable: 3x1.5mm² or 3x2.5mm²

Options

- **CGS-20:** Smaller cable glands
Set include 2 pcs M20 cable glands with M25-M20 adapters for 7-13mm cables

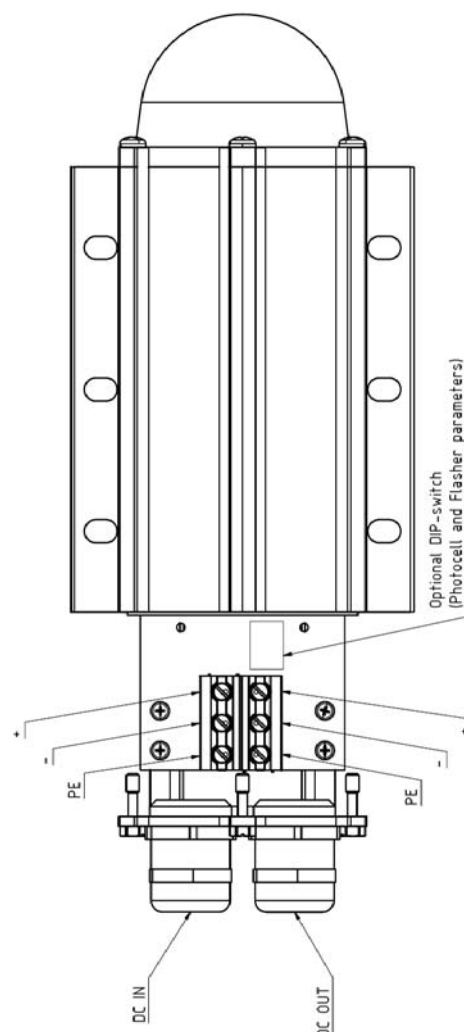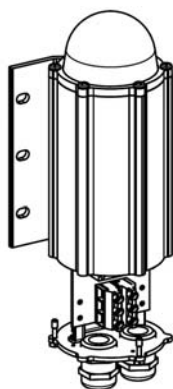


PCFL DIP switches

DIP1	DIP2	PHOTOCELL
OFF	OFF	OFF (light always ON)
ON	OFF	200 lux
OFF	ON	400 lux
ON	ON	800 lux

DIP3	DIP4	FLASH RATE - flash duration 250ms
OFF	OFF	STEADY BURNING
ON	OFF	20 fpm
OFF	ON	40 fpm
ON	ON	60 fpm

	OFF	ON
1.	<input type="checkbox"/>	<input type="checkbox"/>
2.	<input type="checkbox"/>	<input type="checkbox"/>
3.	<input type="checkbox"/>	<input type="checkbox"/>
4.	<input type="checkbox"/>	<input type="checkbox"/>

Default DIP settings:
800 lux, steady burning

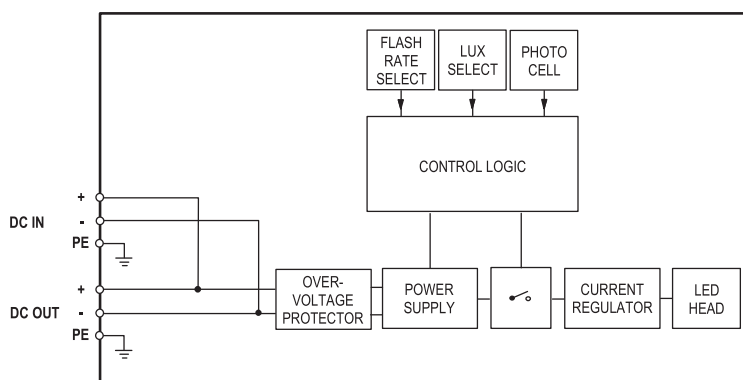


CEL-LI-25-DCW-PCFL block diagram

25cd Low-intensity Obstruction Light - Photocell and Flasher 10-60V_{DC}

Defence Infrastructure Organisation - Ministry of Defence

CEL-LI-25-DCW-PCFL - LED Aircraft Warning Light

Mechanical dimensions

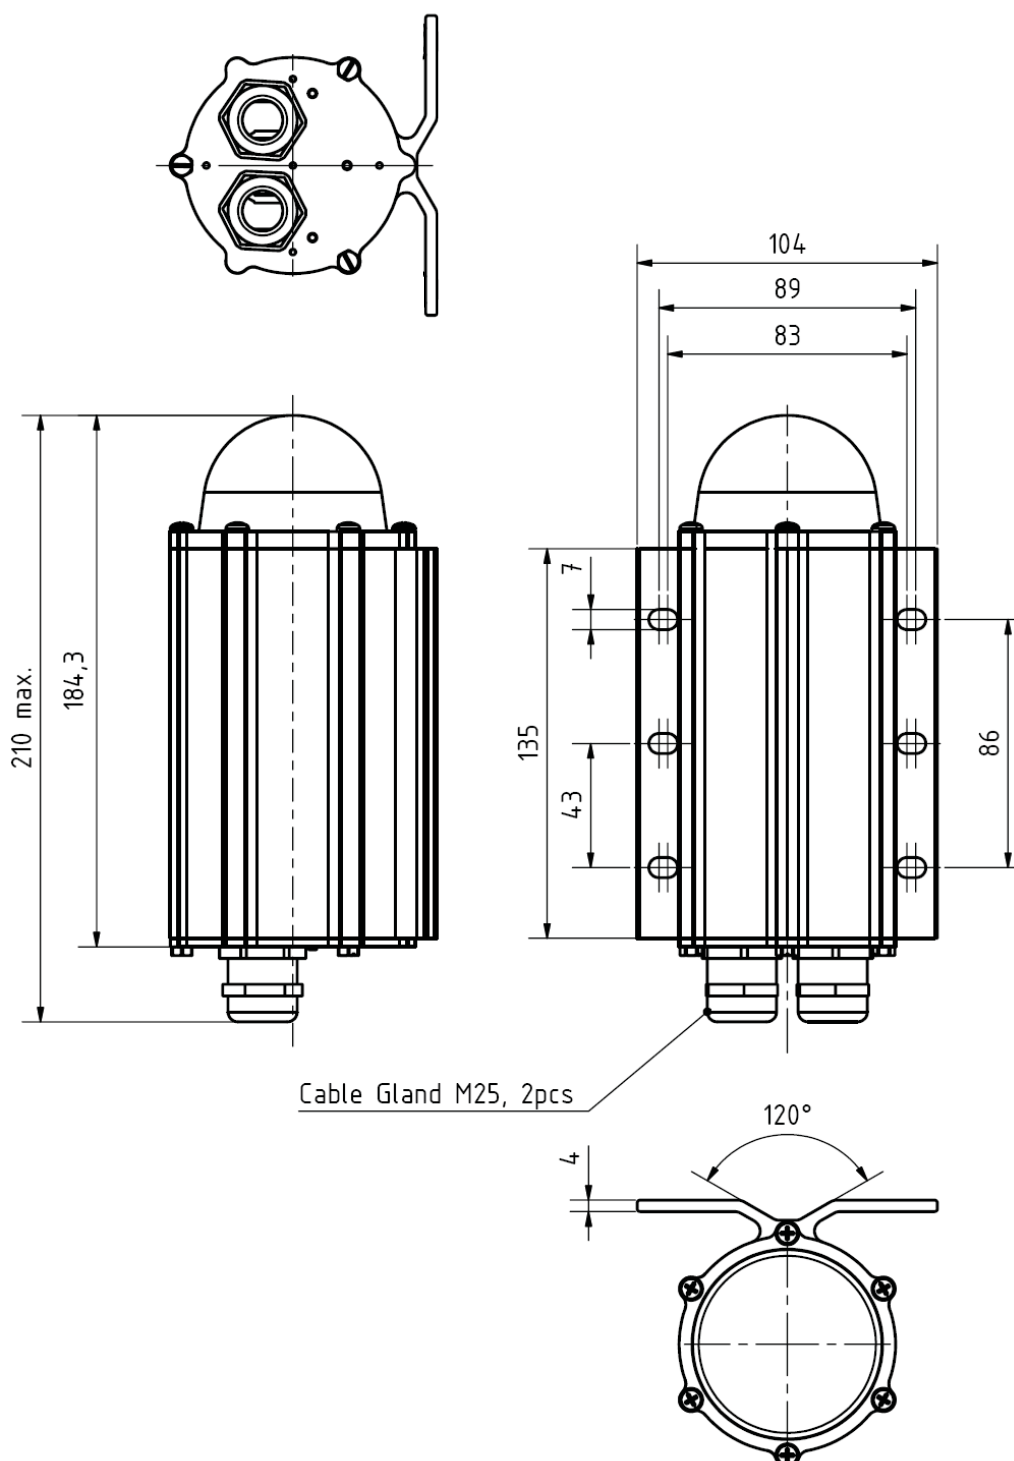

25cd Low-intensity Obstruction Light - Photocell and Flasher 10-60VDC

Defence Infrastructure Organisation - Ministry of Defence

CEL-LI-25-DCW-PCFL - LED Aircraft Warning Light

There are several types of mounting sets available as option:

CEL-MS-HV80

Mounting set for 33-80mm vertical or horizontal pipe


Mounting set includes:

- 2 pcs M6 U-bolt
- 8 pcs M6 hex nut
- 4 pcs 6/12mm washer

All parts AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-HV80 datasheet

Order Code: **CEL-MS-HV80**

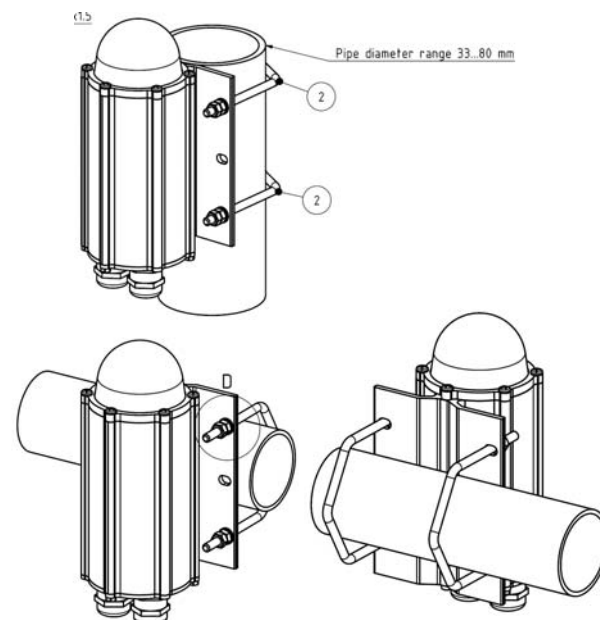

CEL-MS-EV60

Mounting set with extension plate for 30-60mm vertical pipe installation


Mounting set include:

- 2 pcs M8 U-bolt, 8 pcs M8 hex nut
- 4 pcs M6x30 bolt, 8 pcs M6 hex nut, 4 pcs 6/12 washer
- 1 pcs extension plate

Extension plate marine grade anodised aluminium, other parts AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-EV60 datasheet

Order Code: **CEL-MS-EV60**

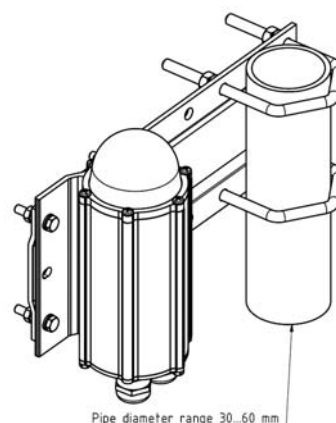

CEL-MS-EV100:

Mounting set with extension plate for 60-100mm vertical pipe installation


Mounting set include:

- 2 pcs M8 U-bolt, 8 pcs M8 hex nut
- 4 pcs M6x30 bolt, 8 pcs M6 hex nut, 4 pcs 6/12 washer
- 1 pcs extension plate

Extension plate marine grade anodised aluminium, other parts AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-EV100 datasheet

Order Code: **CEL-MS-EV100**

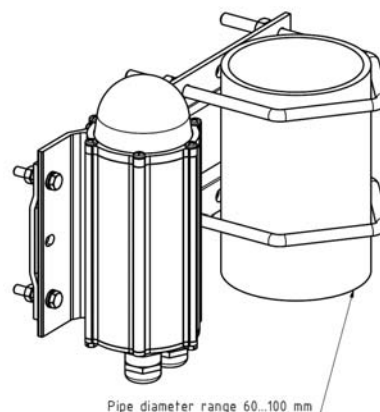

25cd Low-intensity Obstruction Light - Photocell and Flasher 10-60Vdc

Defence Infrastructure Organisation - Ministry of Defence

CEL-LI-25-DCW-PCFL - LED Aircraft Warning Light

CEL-MS-EV150:

Mounting set with extension plate for 100-150 mm vertical pipe installation


Mounting set includes:

- 2 pcs M8 U-bolt, 8 pcs M8 hex nut
- 4 pcs M6x30 bolt, 8 pcs M6 hex nut, 4 pcs 6/12 washer
- 1 pcs extension plate

Extension plate hot dipped galvanised steel, other parts AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-EV150 datasheet

Order Code: **CEL-MS-EV150**

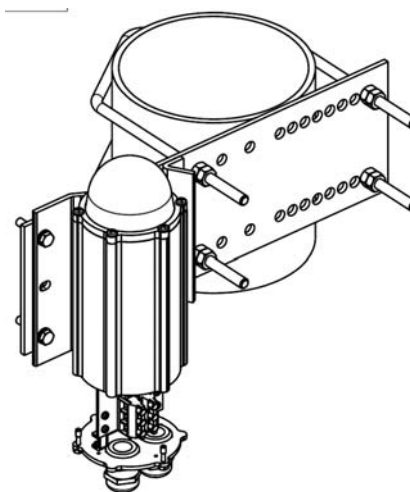

CEL-MS-DV60:

Double mounting set with extension plate for 30-60 mm vertical pipe installation


Mounting set includes:

- 2 pcs M8 U-bolt, 8 pcs M8 hex nut
- 8 pcs M6x30 bolt, 16 pcs M6 hex nut, 8 pcs 6/12 washer
- 1 pcs extension plate

Extension marine grade anodised aluminium, other parts AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-DV60 datasheet

Order Code: **CEL-MS-DV60**

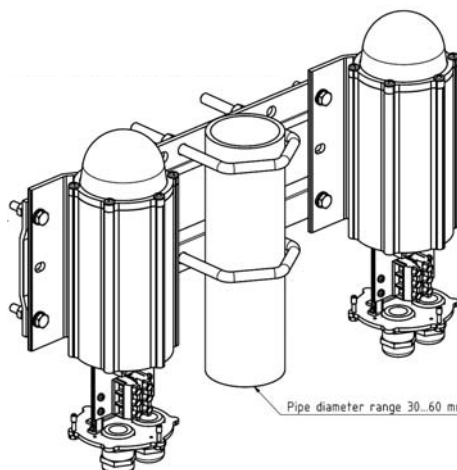

CEL-MS-DV100:

Double mounting set with extension plate for 60-100mm vertical pipe installation


Mounting set includes:

- 2 pcs M8 U-bolt, 8 pcs M8 hex nut
- 8 pcs M6x30 bolt, 16 pcs M6 hex nut, 8 pcs 6/12 washer
- 1 pcs extension plate

Extension marine grade anodised aluminium, other parts AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-DV100 data sheet

Order Code: **CEL-MS-DV100**

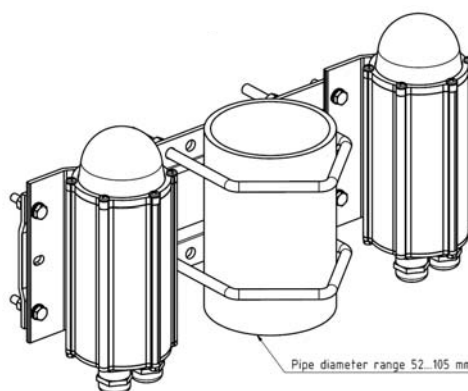

25cd Low-intensity Obstruction Light - Photocell and Flasher 10-60Vdc

Defence Infrastructure Organisation - Ministry of Defence

CEL-LI-25-DCW-PCFL - LED Aircraft Warning Light

CEL-MS-RW

Mounting set for horizontal plate or wall installation


Mounting set includes:

- 4 pcs M6x30 bolt, 8 pcs M6 hex nut, 4 pcs 6/12 washer
- 1 pcs L-shape 2 mm plate

All parts AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-RW datasheet

Order Code: **CEL-MS-RW**

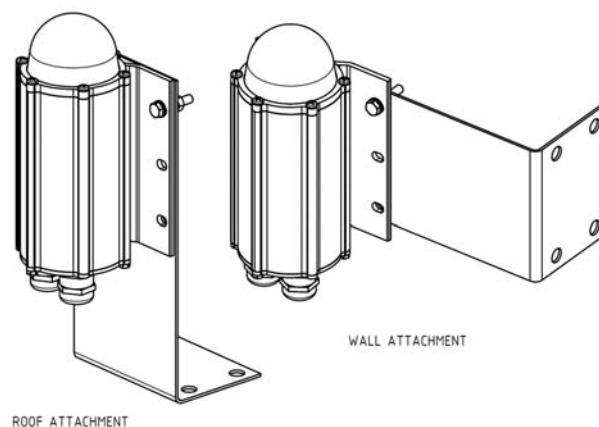

CEL-MS-LVU

Mounting set for L and V-shape profiles

Mounting set includes


- 1 set accessories for light unit fitting to plate
- 1 pcs extension plate with adjusting plate and accessories

Extension plate hot dip galvanised steel, other parts

AISI 316 acid proof steel

More detailed mechanical data: CEL-MS-LVU datasheet

Order Code: **CEL-MS-LVU**

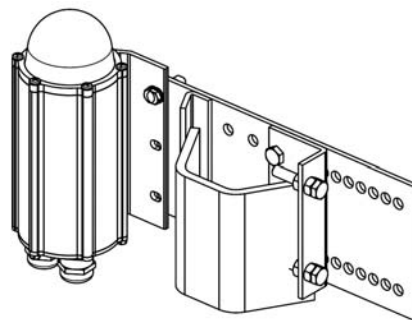

CEL-MS-N1B

Mounting set for 1" NPT at bottom

More detailed mechanical dimensions: CEL-MS-N1 B dataheet

Order Code: **CEL-MS-N1 B**

